

# Flat

Design by Ichiro Iwasaki.

## Reference

**5945.**

## Application

Floor Lamps

## Installation type

Surface

## Description

The Flat floor lamp offers multiple functionality; material and light are integrated in a single body. The Flat collection contains various planes of light that rise up to become self-illuminating supports.

## Diffuser

Polycarbonate diffuser

## Materials

Body: Steel

Base: Steel

Head: Aluminium

Reflector: Aluminum

## Finish




**5945-13** Grey L1 (NCS S 1000-N)



**5945-47** Green L1 (NCS S 4005-G80Y)

## Sketch



## Electrical characteristics

2 x LED PLATE 7W 400mA



Total 14.0 W



# VIBIA



**Light source:** 2700K CRI >90 2400 lm 171 lm/W

**Driver included:** CC - Constant Current 400 mA 100~240V 50/60Hz

**Electronic dimming** PUSH

## Technical characteristics

- 24V transformer at plug

## Physical characteristics

1 Box / 0.96 x 0.72 x 0.72 m. / Vol. 0.4976 m<sup>3</sup> /

Gross weight 15.9 kg. / Net weight 15.3 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



## Photometric data

Efficiency : 64.98 lm/W

Isolux : floor

Coordinate system : CG

Light position :


Total flux : 1280.18 lm

X=0.00m Y=0.00m Z=2.50m

Maximum value : 343.56 cd

Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

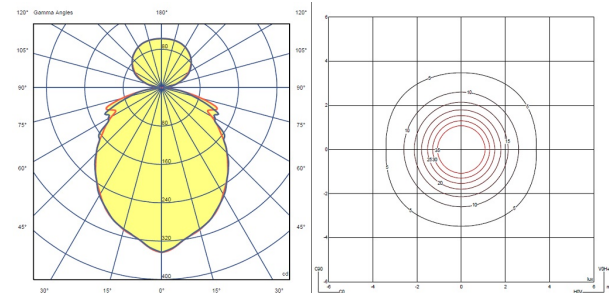

## Certificates



