

Duo

Design by Ramos & Bassols.

Reference

4878.

Application

Ceiling Lamps

Installation type

Surface Canopy

Description

Duo is a ceiling light with surface installation where the natural warm appearance of the oak wood on the inside is combined with the technical refinement of the aluminium metal wrap on the outside.

Diffuser

Polycarbonate diffuser

Materials

Shade: Oak wood

Finish



4878-18 Graphite (ADAPTA RF 9913 WX)




4878-58 Cream (RAL 7044)



4878-93 White (RAL 9016)

Sketch



Electrical characteristics

1 x LED PLATE 25,8W 500mA

AND

1 x LED PLATE 26,4W 700mA



Total 26.4 W

VIBIA



Light source: 2700K CRI >90 2206 lm 98 lm/W

Fixture: 1285 lm 49.8 lm/W

Driver included: CC - Constant Current 500 mA 110~240V 50/60Hz

Electronic dimming: DALI 1-10V PUSH

Optional dimming: Casambi

Physical characteristics

1 Box / 0.79 x 0.79 x 0.59 m. / Vol. 0.3654 m³ /

Gross weight 20.3 kg. / Net weight 14.0 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 49.81 lm/W

Coordinate system : CG

Total flux : 1284.41 lm

Maximum value : 727.04 cd


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

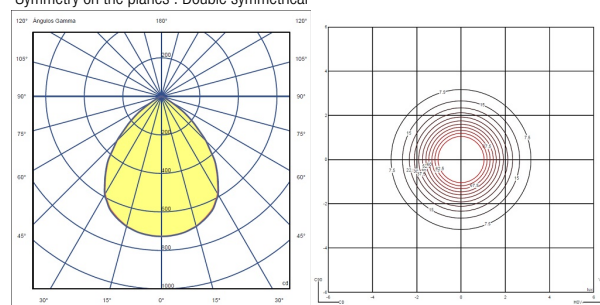

Certificates

